




- Screw locking acc. to DIN EN 61076-2-101
- Degree of protection IP67
- Moulded versions
- Degree of protection IP68
- Easy assembly
- Excellent EMC shielding
- Versions with shielding rings/iris type spring
- Angled connectors adjustable in 4 positions

Description**Drawing****Contacts****Cable outlet****Screw clamp****Wire clamp**


Male cable connector, screw clamp/wire clamp, with shielding ring, shieldable

4	6–8 mm	99 1429 810 04		—
	6–8 mm	99 1437 810 05		99 1535 810 05
5	6,5–8,5 mm	99 1437 910 05		99 1535 910 05
	8–10 mm	99 1437 935 05		—

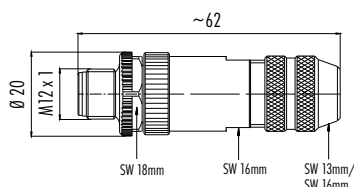


Male cable connector, screw clamp/wire clamp, iris type spring, shieldable

5	5–8 mm	99 1439 810 05		99 1533 810 05
	8–9 mm	99 1439 910 05		99 1533 910 05

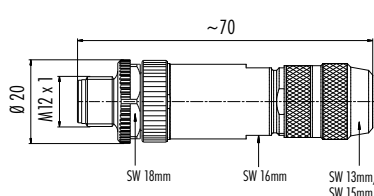


Male cable connector, screw clamp, with shielding ring, stainless steel version, shieldable

4	5,5–8,6 mm	99 1429 995 04
5		99 1437 995 05



Male cable connector, crimp, shieldable

4	5–8 mm	99 1433 810 04
---	--------	----------------

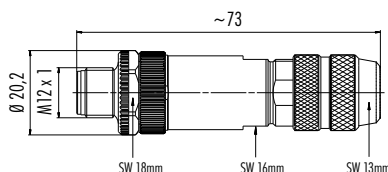**NEW**


Crimp contacts see page 150

Specifications

Contacts	4	5
Wire gauge	screw clamp max. 0,75 mm ² (max. AWG 20), wire clamp max. 0,5 mm ² (max. AWG 20)	
Mechanical operation	Optalloy > 50 Mating cycles, Gold > 100 Mating cycles	
Temperature range	– 40 °C / + 85 °C	
Rated voltage	250 V	60 V
Pollution degree	3	
Rated current (40°C)	4 A	
Contact plating	plastic versions: CuSnZn (Optalloy), others Au (Gold)	
Material of housing	PA, straight, shielded version CuZn (brass nickel plated), angled shielded versions zinc diecasting nickel plated	

Description

Male cable connector, metal locking system, screw clamp




Contacts

Cable outlet

Ordering-No.


4	4–6 mm	99 0429 15 04
	6–8 mm	99 0429 105 04
5	4–6 mm	99 0437 15 05
	6–8 mm	99 0437 105 05

Male angled connector, metal locking system, screw clamp



4	4–6 mm	99 0429 135 04
	6–8 mm	99 0429 145 04
5	4–6 mm	99 0437 135 05
	6–8 mm	99 0437 145 05


Male angled connector, screw clamp/wire clamp, with shielding ring, shieldable



It is possible to turn and fix the contact carrier in 4 different 90° positions

Contacts	Cable outlet	Screw clamp	Wire clamp
4	6–8 mm	99 1429 820 04	c-us –
5	6–8 mm	99 1437 820 05	c-us 99 1535 820 05
	6,5–8,5 mm	99 1437 920 05	c-us 99 1535 920 05


Male angled connector, screw clamp/wire clamp, iris type spring, shieldable



It is possible to turn and fix the contact carrier in 4 different 90° positions


5	5–8 mm	99 1439 820 05	c-us 99 1533 820 05
---	--------	----------------	---------------------

Cable connectors, with shielding ring, shieldable

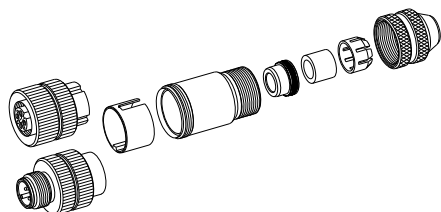


Female insert/
Male insert
Insulating sleeve tightly built into coupling sleeve
Shielding ring
O-ring
Seal
Pinch ring
Pressing screw

Cable connectors, with iris type spring, shieldable

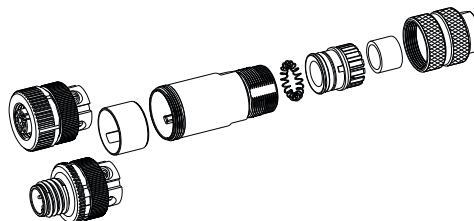


Female insert/
Male insert
Insulating sleeve, Sleeve,
Pressing spring, O-ring,
Pinch ring, Seal,
Pressing screw
are premounted

Angled connectors, shieldable




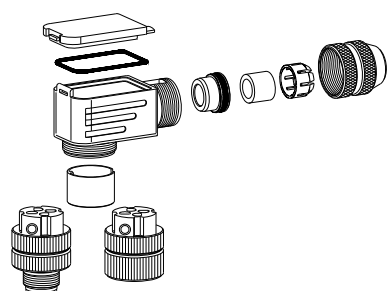


Female insert/
Male insert
Insulating sleeve tightly built into coupling sleeve
Housing
Seal
Cover
Shielding ring
O-ring
Seal
Pinch ring
Pressing screw


Angled connectors, with iris type spring, shieldable

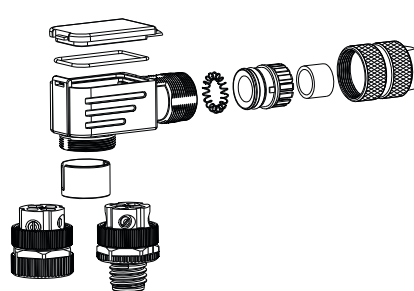


Female insert/
Male insert
Insulating sleeve, Housing,
Pressing spring, O-ring,
Pinch ring, Seal,
Pressing screw
are premounted
O-ring
Cover

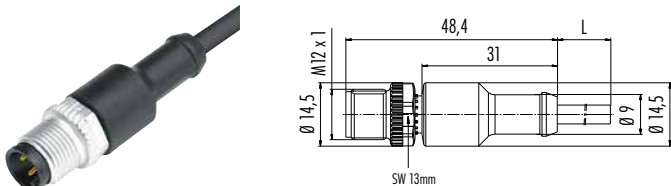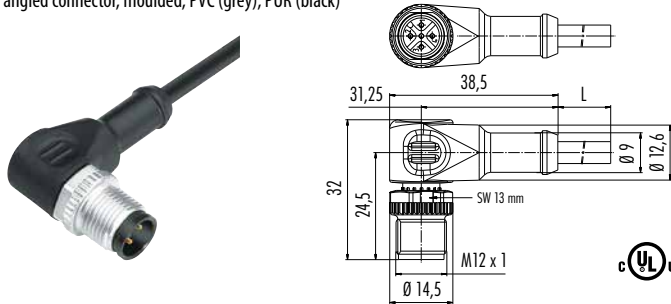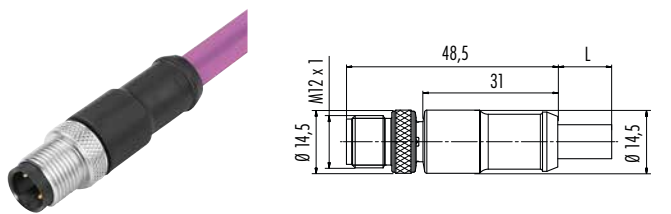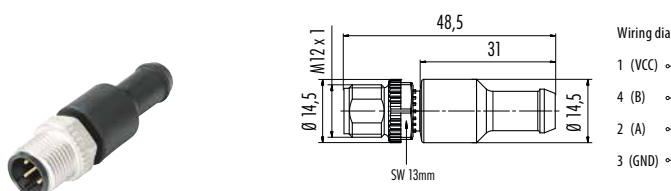Description	Drawing	Contacts	Cable length	PVC ¹⁾	PUR ¹⁾
Male cable connector, moulded, PVC (grey), PUR (black)		3 x 0,34	2 m 5 m	77 4429 0000 20003-0200 77 4429 0000 20003-0500	77 4429 0000 50003-0200 77 4429 0000 50003-0500
		4 x 0,34	2 m 5 m	77 4429 0000 20004-0200 77 4429 0000 20004-0500	77 4429 0000 50004-0200 77 4429 0000 50004-0500
		5 x 0,25	2 m 5 m	77 4429 0000 20005-0200 77 4429 0000 20005-0500	77 4429 0000 50005-0200 77 4429 0000 50005-0500
Male angled connector, moulded, PVC (grey), PUR (black)		3 x 0,34	2 m 5 m	77 4427 0000 20003-0200 77 4427 0000 20003-0500	77 4427 0000 50003-0200 77 4427 0000 50003-0500
		4 x 0,34	2 m 5 m	77 4427 0000 20004-0200 77 4427 0000 20004-0500	77 4427 0000 50004-0200 77 4427 0000 50004-0500
		5 x 0,25	2 m 5 m	77 4427 0000 20005-0200 77 4427 0000 20005-0500	77 4427 0000 50005-0200 77 4427 0000 50005-0500
Male cable connector, shielded, PROFIBUS		2	2 m 5 m 10 m	77 4329 0000 60702-0200 77 4329 0000 60702-0500 77 4329 0000 60702-1000	
Male terminating connector, PROFIBUS		4	–	77 9835 0000 00004	
	Wiring diagram 1 (VCC) → R1 4 (B) → R2 2 (A) → R3 3 (GND) → R3				


Specifications	Cable connectors, moulded			
Contacts	2 PROFIBUS	3	4	5
Wire gauge	0,25 mm² (AWG 24)	0,34 mm² (AWG 22)		
Mechanical operation	> 100 Mating cycles			
Temperature range	– 25 °C /+ 80 °C	– 25 °C /+ 90 °C (+ 80 °C UL)		
Rated voltage	60 V	250 V		60 V
Pollution degree	3			
Rated current (40°C)	1 A	4 A		
Contact plating	Au (Gold)			
Material of housing	PUR			

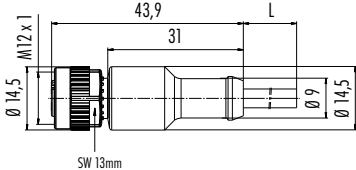Description	Drawing	Contacts	Cable length	PVC ¹⁾	PUR ¹⁾
Female cable connector, moulded, PVC (grey), PUR (black)		3 x 0,34	2 m	77 4430 0000 20003-0200	77 4430 0000 50003-0200
			5 m	77 4430 0000 20003-0500	77 4430 0000 50003-0500
		4 x 0,34	2 m	77 4430 0000 20004-0200	77 4430 0000 50004-0200
			5 m	77 4430 0000 20004-0500	77 4430 0000 50004-0500
		5 x 0,25	2 m	77 4430 0000 20005-0200	77 4430 0000 50005-0200
			5 m	77 4430 0000 20005-0500	77 4430 0000 50005-0500

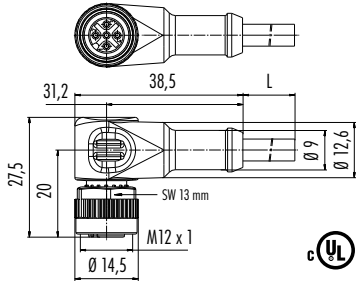

Female angled connector, moulded, PVC (grey), PUR (black)		3 x 0,34	2 m	77 4434 0000 20003-0200	77 4434 0000 50003-0200
			5 m	77 4434 0000 20003-0500	77 4434 0000 50003-0500
		4 x 0,34	2 m	77 4434 0000 20004-0200	77 4434 0000 50004-0200
			5 m	77 4434 0000 20004-0500	77 4434 0000 50004-0500
		5 x 0,25	2 m	77 4434 0000 20005-0200	77 4434 0000 50005-0200
			5 m	77 4434 0000 20005-0500	77 4434 0000 50005-0500




Female cable connector, shielded, PROFIBUS		2	2 m	77 4330 0000 60702-0200
			5 m	77 4330 0000 60702-0500
			10 m	77 4330 0000 60702-1000




Specifications	Standard Cable					
Contacts	3		4		5	
Wire gauge	3 x 0,34 mm ² (AWG 22)		4 x 0,34 mm ² (AWG 22)		5 x 0,34 mm ² (AWG 24)	
Material jacket	PVC grey	PUR	PVC grey	PUR	PVC grey	PUR
Insulation of wire	PVC grey	PP	PVC grey	PP	PVC grey	PP
Design of wire (mm)	32 x 0,1					
Cable diameter (mm)	4,5	4,3	4,8	4,7	4,8	4,7
Temperature range cable in move	PVC: - 5 °C / + 105 °C PUR: - 25 °C / + 90 °C (in chain flex application + 60 °C)					
Temperature range cable fixed	PVC: - 40 °C / + 105 °C PUR: - 50 °C / + 90 °C					
Bending radius (at 10 x D)	2 Mio.	5 Mio.	2 Mio.	5 Mio.	2 Mio.	5 Mio.
Approval	UL/CSA					
UL-style	PVC: AWM 2517 PUR: AWM 20549					
Chain flex application	bending radius min. 10 x D, permitted acceleration 5 m/s ²					

Specifications	PROFIBUS Cable
Contacts	2
Wire gauge	1 x 2 x 0,25 mm ² (AWG 24)
Material jacket	PUR
Insulation of wire	PE foam
Design of wire (mm)	19 x 0,127 (AWG 24 x 19)
Cable diameter (mm)	7,8
UL-style	AWM 20236


¹⁾ Standard cable length is 2 m/5 m. Other length on request.

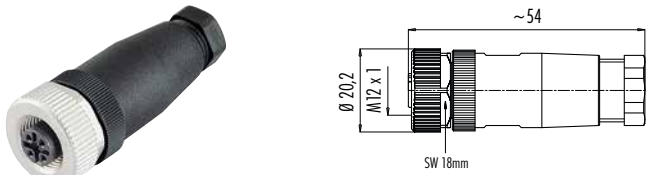Description	Drawing	Contacts	Cable outlet	Ordering-No.
Female cable connector, metal locking system, screw clamp		4	4–6 mm	99 0430 25 04
			6–8 mm	99 0430 225 04
		5	4–6 mm	99 0436 25 05
			6–8 mm	99 0436 225 05




Female cable connector, screw clamp/wire clamp, with shielding ring, shieldable

Contacts	Cable outlet	Screw clamp	Wire clamp
4	6–8 mm	99 1430 810 04	 –
	6–8 mm	99 1436 810 05	 99 1536 810 05
5	6,5–8,5 mm	99 1436 910 05	 99 1536 910 05
	8–10 mm	99 1436 935 05	 –




Female cable connector, screw clamp/wire clamp, iris type spring, shieldable

5	5–8 mm	99 1438 810 05	 99 1534 810 05
	8–9 mm	99 1438 910 05	 99 1534 910 05

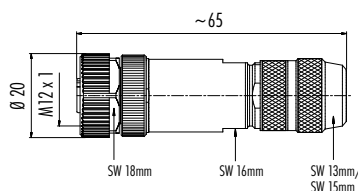

Female cable connector, screw clamp, with shielding ring, stainless steel version, shieldable


4	5,5–8,6 mm	99 1430 995 04
5		99 1436 995 05



Female cable connector, crimp, shieldable

4	5–8 mm	99 1434 810 04
---	--------	----------------

 **NEW**

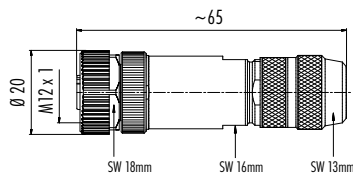

Crimp contacts see page 150





Contact arrangements male insert (mating side)


2/4 contacts

3 contacts


4 contacts


5 contacts








Description	Drawing	Contacts	Cable outlet	Ordering-No.
Female angled connector, metal locking system, screw clamp		4	4–6 mm	99 0430 135 04
			6–8 mm	99 0430 235 04
		5	4–6 mm	99 0436 135 05
			6–8 mm	99 0436 235 05

Male angled connector, screw clamp/wire clamp, with shielding ring, shieldable		4	6–8 mm	99 1430 820 04		—
		5	6–8 mm	99 1436 820 05		99 1536 820 05
			6,5–8,5 mm	99 1436 920 05		99 1536 920 05

Male angled connector, screw clamp/wire clamp, iris type spring, shieldable		5	5–8 mm	99 1438 820 05		99 1534 820 05

Male contact, PU 100 pieces		Wire gauge	AWG	Ordering-No.
		0,14 mm ² – 0,34 mm ²	26–22	61 1224 146
		0,34 mm ² – 0,5 mm ²	22–20	61 1154 146
		0,75 mm ² – 1,0 mm ²	18–16	61 1225 146
		1,0 mm ² – 1,5 mm ²	16	61 1226 146

Female contact, PU 100 pieces		0,14 mm ² – 0,34 mm ²	26–22	61 1227 146
		0,34 mm ² – 0,5 mm ²	22–20	61 1155 146
		0,75 mm ² – 1,0 mm ²	18–16	61 1228 146
		1,0 mm ² – 1,5 mm ²	16	61 1229 146

Contact arrangements female insert (mating side)					Colour of wire, moulded cable and panel mount connectors				
2/4 contacts	3 contacts	4 contacts	5 contacts		2/4 contacts PROFIBUS	3 contacts	4 contacts	5 contacts	
					1 not connected	1 brown	1 brown	1 brown	
					2 green	2 not connected	2 white	2 white	
					3 not connected	3 blue	3 blue	3 blue	
					4 red	4 black	4 black	4 black	
								5 grey	
					Shield = Coupling ring				

Description	Drawing	Contacts	Fixing thread	Ordering-No.
Male panel mount connector, fixing thread, solder		4	M12 x 0,5	09 0431 90 04
Male panel mount connector, fixing thread, solder		4 5	PG 9 M16 x 1,5 M16 x 1,5	86 4233 1002 00004 86 4333 1002 00004 86 4333 1002 00005
Male panel mount connector, fixing thread, solder		4	PG 11	09 0435 90 04
Male panel mount connector, fixing thread, solder		4 5	PG 13,5 M20 x 1,5 M20 x 1,5	86 4533 1002 00004 86 4633 1002 00004 86 4633 1002 00005

Specifications	Panel mount connector	
Contacts	4	5
Wire gauge	max. 0,25 mm² (max. AWG 24), single wires AWG 24 (0,25 mm²)	
Mechanical operation	> 100 Mating cycles	
Temperature range	– 40 °C /+ 85 °C	
Rated voltage	250 V	60 V
Pollution degree	3	
Rated current (40°C)	4 A	
Contact plating	Au (Gold)	
Material of housing	PA, zinc diecasting nickel plated	

Description


Drawing

Contacts

Fix. thread

Ordering-No.

Male panel mount connector with single wires, metal housing

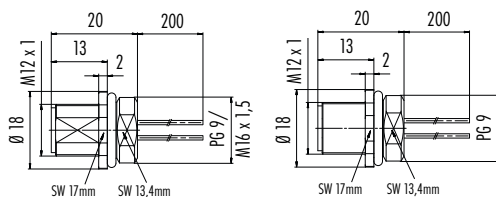


Stainless steel version

4	PG 9	76 0133 0011 00104–0200
	M16 x 1,5	76 0233 0011 00104–0200
	PG 9 Stainless steel	76 2133 0111 00104–0200
5	PG 9	76 0133 0011 00105–0200
	M16 x 1,5	76 0233 0011 00105–0200
	PG 9 Stainless steel	76 2133 0111 00105–0200




Male panel mount connector, positioning possible, with single wires, metal housing




4	PG 9	76 0733 0011 00104-0200
	M16 x 1,5	76 0833 0011 00104-0200
5	PG 9	76 0733 0011 00105-0200
	M16 x 1,5	76 0833 0011 00105-0200

Male panel mount connector, front fastened, with single wires, metal housing



4	PG 9	76 0533 1011 00104-0200
5	PG 9	76 0533 1011 00105-0200

Male panel mount connector, dip-solder/front fastened, dip-solder, metal housing

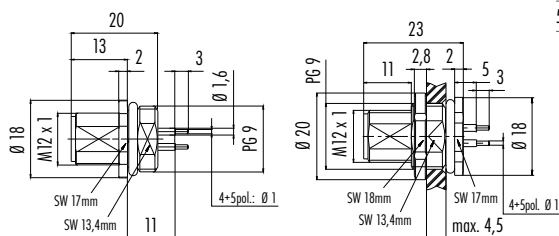


fastened from back side

front fastened


Contacts	Fix. thread	Fastened from back side	Front fastened
4	PG 9	—	86 0533 1000 00004
5	PG 9	86 0133 0000 00005	86 0533 1000 00005

Male panel mount connector, front fastened, dip-solder, metal housing



Contacts	Fix. thread	Ordering-No.
4	M12 x 1	86 1033 1100 00004
5		86 1033 1100 00005

Male panel mount connector, front fastened, dip-solder,
with shielding sheet









PCB thickness: 1,6 mm

Hexagonal nut enclosed loose

5 PG 9 86 0533 1120 00005


¹⁾ Standard wire length is 200 mm for 76-order-numbers. Other length on request.

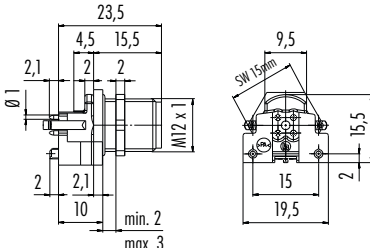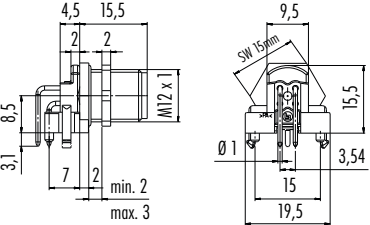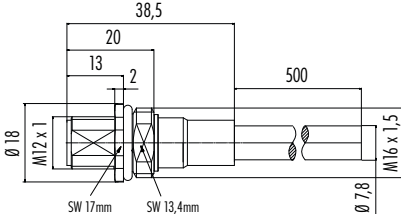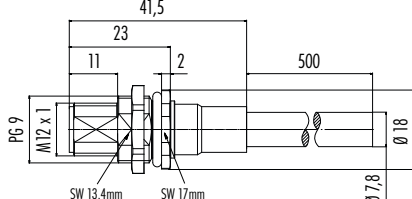Description	Drawing	Contacts	Ordering-No.		
Male receptacle for PCB assembly	  	5	99 4445 200 05 99 4445 458 05 with shielding sheet		
Male angled receptacle for PCB assembly	  	5	99 4445 202 05 99 4445 601 05 with shielding sheet		
Male panel mount connector, SMT, with housing, shieldable	  	Contacts	Mounting height	Ordering-No.	
	4	9 mm	99 4431 401 04		
	5		99 4441 401 05		
			NEW		
Male panel mount connector, SMT, with housing, shieldable	  	4	—	09 0443 601 04	
	5		09 0445 601 05		
			NEW		
Male panel mount connector M16, with PROFIBUS-cable, shielded	  	2 x 0,25	0,5 m	M16 x 1,5	70 4433 246 04
Male panel mount connector PG 9, front fastened, with PROFIBUS-cable, shielded	  	2 x 0,25	0,5 m	PG 9	70 4433 247 04
Hexagonal nut enclosed loose					

Description

Female panel mount connector with single wires

Drawing

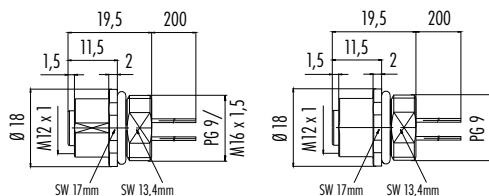

Stainless steel version

Contacts


Fix. thread

Ordering-No.

4	PG 9	76 0134 0011 00104-0200
	M16 x 1,5	76 0234 0011 00104-0200
	PG 9 Stainless steel	76 2134 0111 00104-0200
5	PG 9	76 0134 0011 00105-0200
	M16 x 1,5	76 0234 0011 00105-0200
	PG 9 Stainless steel	76 2134 0111 00105-0200




Female panel mount connector, positioning possible, with single wires, metal housing




4	PG 9	76 0734 0011 00104-0200
	M16 x 1,5	76 0834 0011 00104-0200
5	PG 9	76 0734 0011 00105-0200
	M16 x 1,5	76 0834 0011 00105-0200

Female panel mount connector, front fastened, with single wires, metal housing



4	PG 9	76 0534 1011 00104-0200
5	PG 9	76 0534 1011 00105-0200


Female panel mount connector, dip-solder, metal housing/front fastened, dip-solder, 6 mm contact length

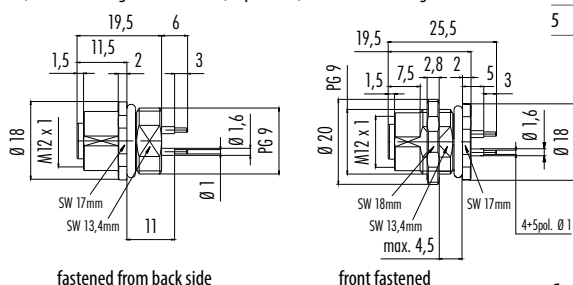

Contacts	Fix. thread	Fastened from back side	Front fastened
4	PG 9	—	86 0534 1000 00004
5	PG 9	86 0134 0000 00005	86 0534 1000 00005




Female panel mount connector, front fastened, dip-solder, with shielding sheet

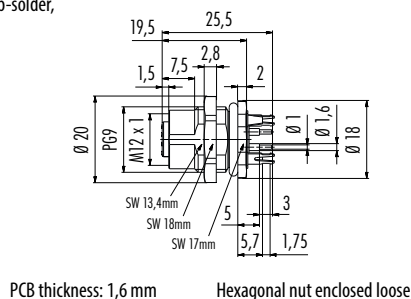

Contacts	Fix. thread	Ordering-No.
5	PG 9	86 0534 1120 00005


Female receptacle for PCB assembly

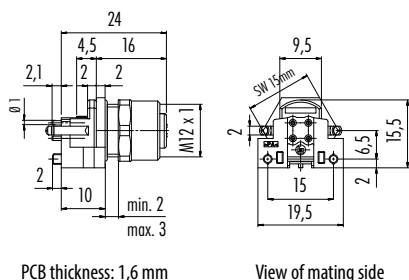


Contacts	Ordering-No.
5	99 4442 200 05
	99 4442 458 05 with shielding sheet

Panel cut out


Panel mount connector

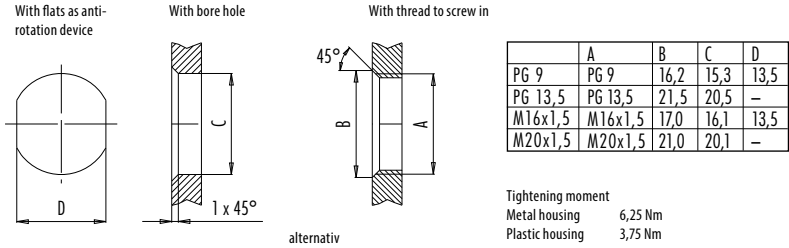


Panel mount connector, front fastened

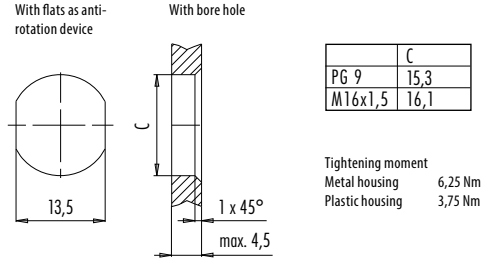


Panel mount connector, positioning possible



Panel mount connector, screw clamp termination

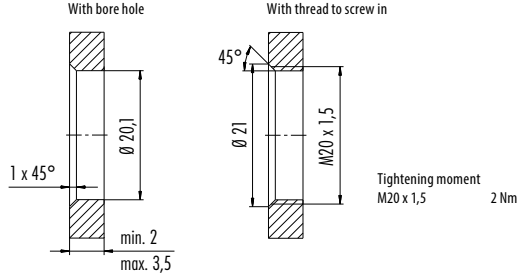

Panel mount connector, with thread M12



Lead-through for control cabinet

